

PB S225-12ES

Self-propelled Scissor lift

22,50 m Working height

1,22 m Total width

indoor + outdoor




Technische Daten

	Working height	22,50 m		Platform extension (scissors)	1,50 m
	Platform height	20,50 m		Gradeability	25 %
	Lift capacity	600 kg		Speed - stowed	1,63 km/h
	Lift capacity platform extension	600 kg		Speed - raised	0,13 km/h
	Total length	4,52 m		Drive type	Electro-hydraulic drive
	Total width	1,22 m		Battery capacity	640 Ah
	Total height	3,57 m		Area of application	indoor + outdoor
	Turning radius outside	3,65 m		People indoor	2
	Transport height	2,73 m		People outdoor	2
	Total weight	9.884 kg		Drivable at full height	Yes

Produktbeschreibung

- The combination of the compact dimensions (only 1,22 m width) and a 90° steering angle promises maximum flexibility
- An electro-hydraulic drive ensures even during long working cycles the necessary power reserves
- The proportional control for all functions of the working platform (driving, lifting, lowering) guarantee precisely and smooth operations
- Via touch of the button the working platform levels thanks to the patented PB support system automatically within a few seconds in an absolute safe position
- Thus the scissor lift is also suitable for inner-city operations on common sidewalks and at tight spaces – and this with a working height of 22,50 m

Arbeitsdiagramm

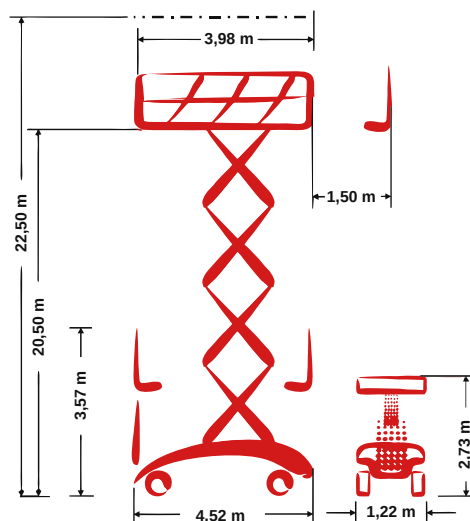

Technische Änderungen / Verbesserungen sind vorbehalten.



Platformers Business

PB Liftechnik GmbH | Gewerbegebiet Gassenäcker | 89429 Oberbechingen

Telefon: +49 (0) 90 77 - 95 00 - 0 | Telefax: +49 (0) 90 77 - 95 00 - 40

E-Mail: info@pblift.de | Website: pblift.de



PB S225-12ES

Self-propelled Scissor lift

22,50 m Working height

1,22 m Total width

indoor + outdoor



Produktbilder



Technische Änderungen / Verbesserungen sind vorbehalten.



Platformers **B**usiness

PB Liftechnik GmbH | Gewerbegebiet Gassenäcker | 89429 Oberbechingen

Telefon: +49 (0) 90 77 - 95 00 - 0 | Telefax: +49 (0) 90 77 - 95 00 - 40

E-Mail: info@pblift.de | Website: pblift.de

