

LIFTLUX

SL205-25/ SL260-25/ SL320-30

The maxi range

 **DIESEL**
Diesel Platform




Manœuvrability



Stability




Durability



LIFTLUX 

Think Bigger


SL 260-25 DS

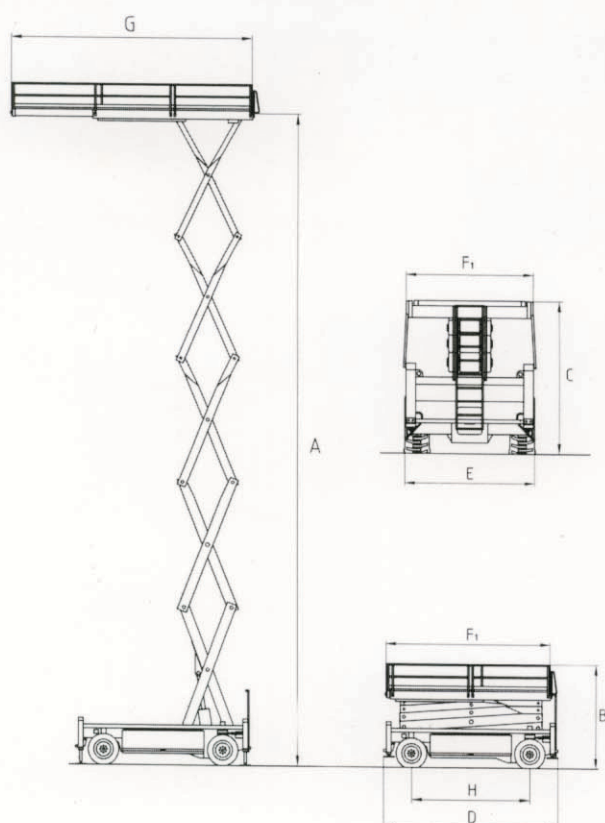

Specifications

Working height (m)	28.3
Platform height (m)	26.3 A
Platform Capacity (kg)	1,000
Overall height (m)	4.20 B
Platform height stowed (m)	3.10 C
Length stowed (m)	7.15 D
Width (m)	2.50 E
Platform size (m)	6.7 x 2.5 F
Platform length fully extended (m)	9.80 G
Wheelbase (m)	4.75 H
Controls	Prop
Travel speed (km/h)	4.0
Turning radius (m) Inside	-
Outside	4.5
Lift / Lower (sec)	85 / 80
Ground clearance (cm)	40
Gradeability	35 %
Standard drive	4 x 4 O.A.
Fold Down - Take Out platform rails	F.D.
Engine - Diesel	Deutz BF4L
	74 hp
Weight (kg)	24,700

SL 320-30 DS

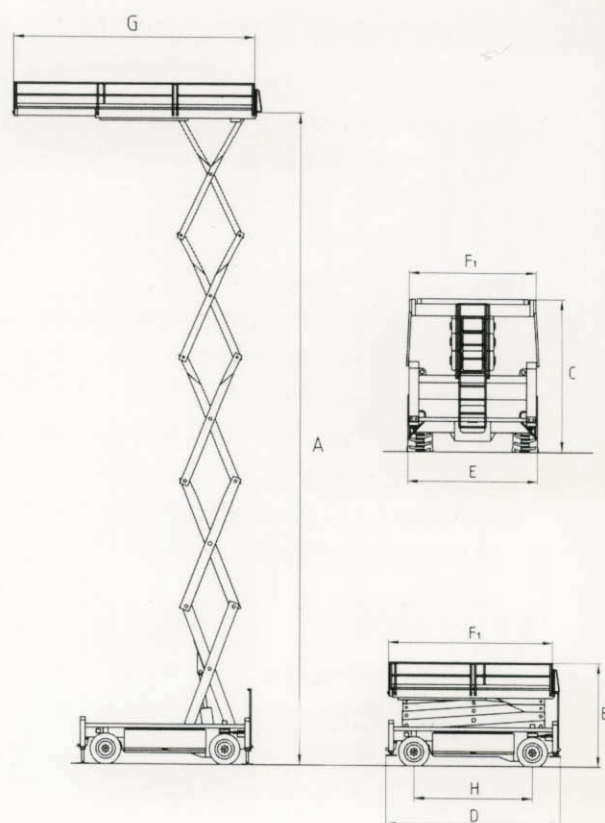

Specifications

Working height (m)	34.0
Platform height (m)	32.0 A
Platform Capacity (kg)	1,400 / 1,000
Overall height (m)	4.65 B
Platform height stowed (m)	3.50 C
Length stowed (m)	8.40 D
Width (m)	3.00 E
Platform size (m)	7.85 x 2.9 F
Platform length fully extended (m)	11.00 G
Wheelbase (m)	5.90 H
Controls	Prop
Travel speed (km/h)	4.0
Turning radius (m) Inside	1.85
Outside	8.7
Lift / Lower (sec)	110 / 100
Ground clearance (cm)	45
Gradeability	30 %
Standard drive	4 x 4 O.A.
Fold Down - Take Out platform rails	F.D.
Engine - Diesel	Deutz F6L
	106 hp
Weight (kg)	39,800